



KE - SERIES

SWF



KE - SERIES

SWF / KE - U H 15 06 - 45

Series



M/C Type

Head Interval (H,K)

Y-Stroke

No. of Heads (2-8)

No. of Colors (15,12)

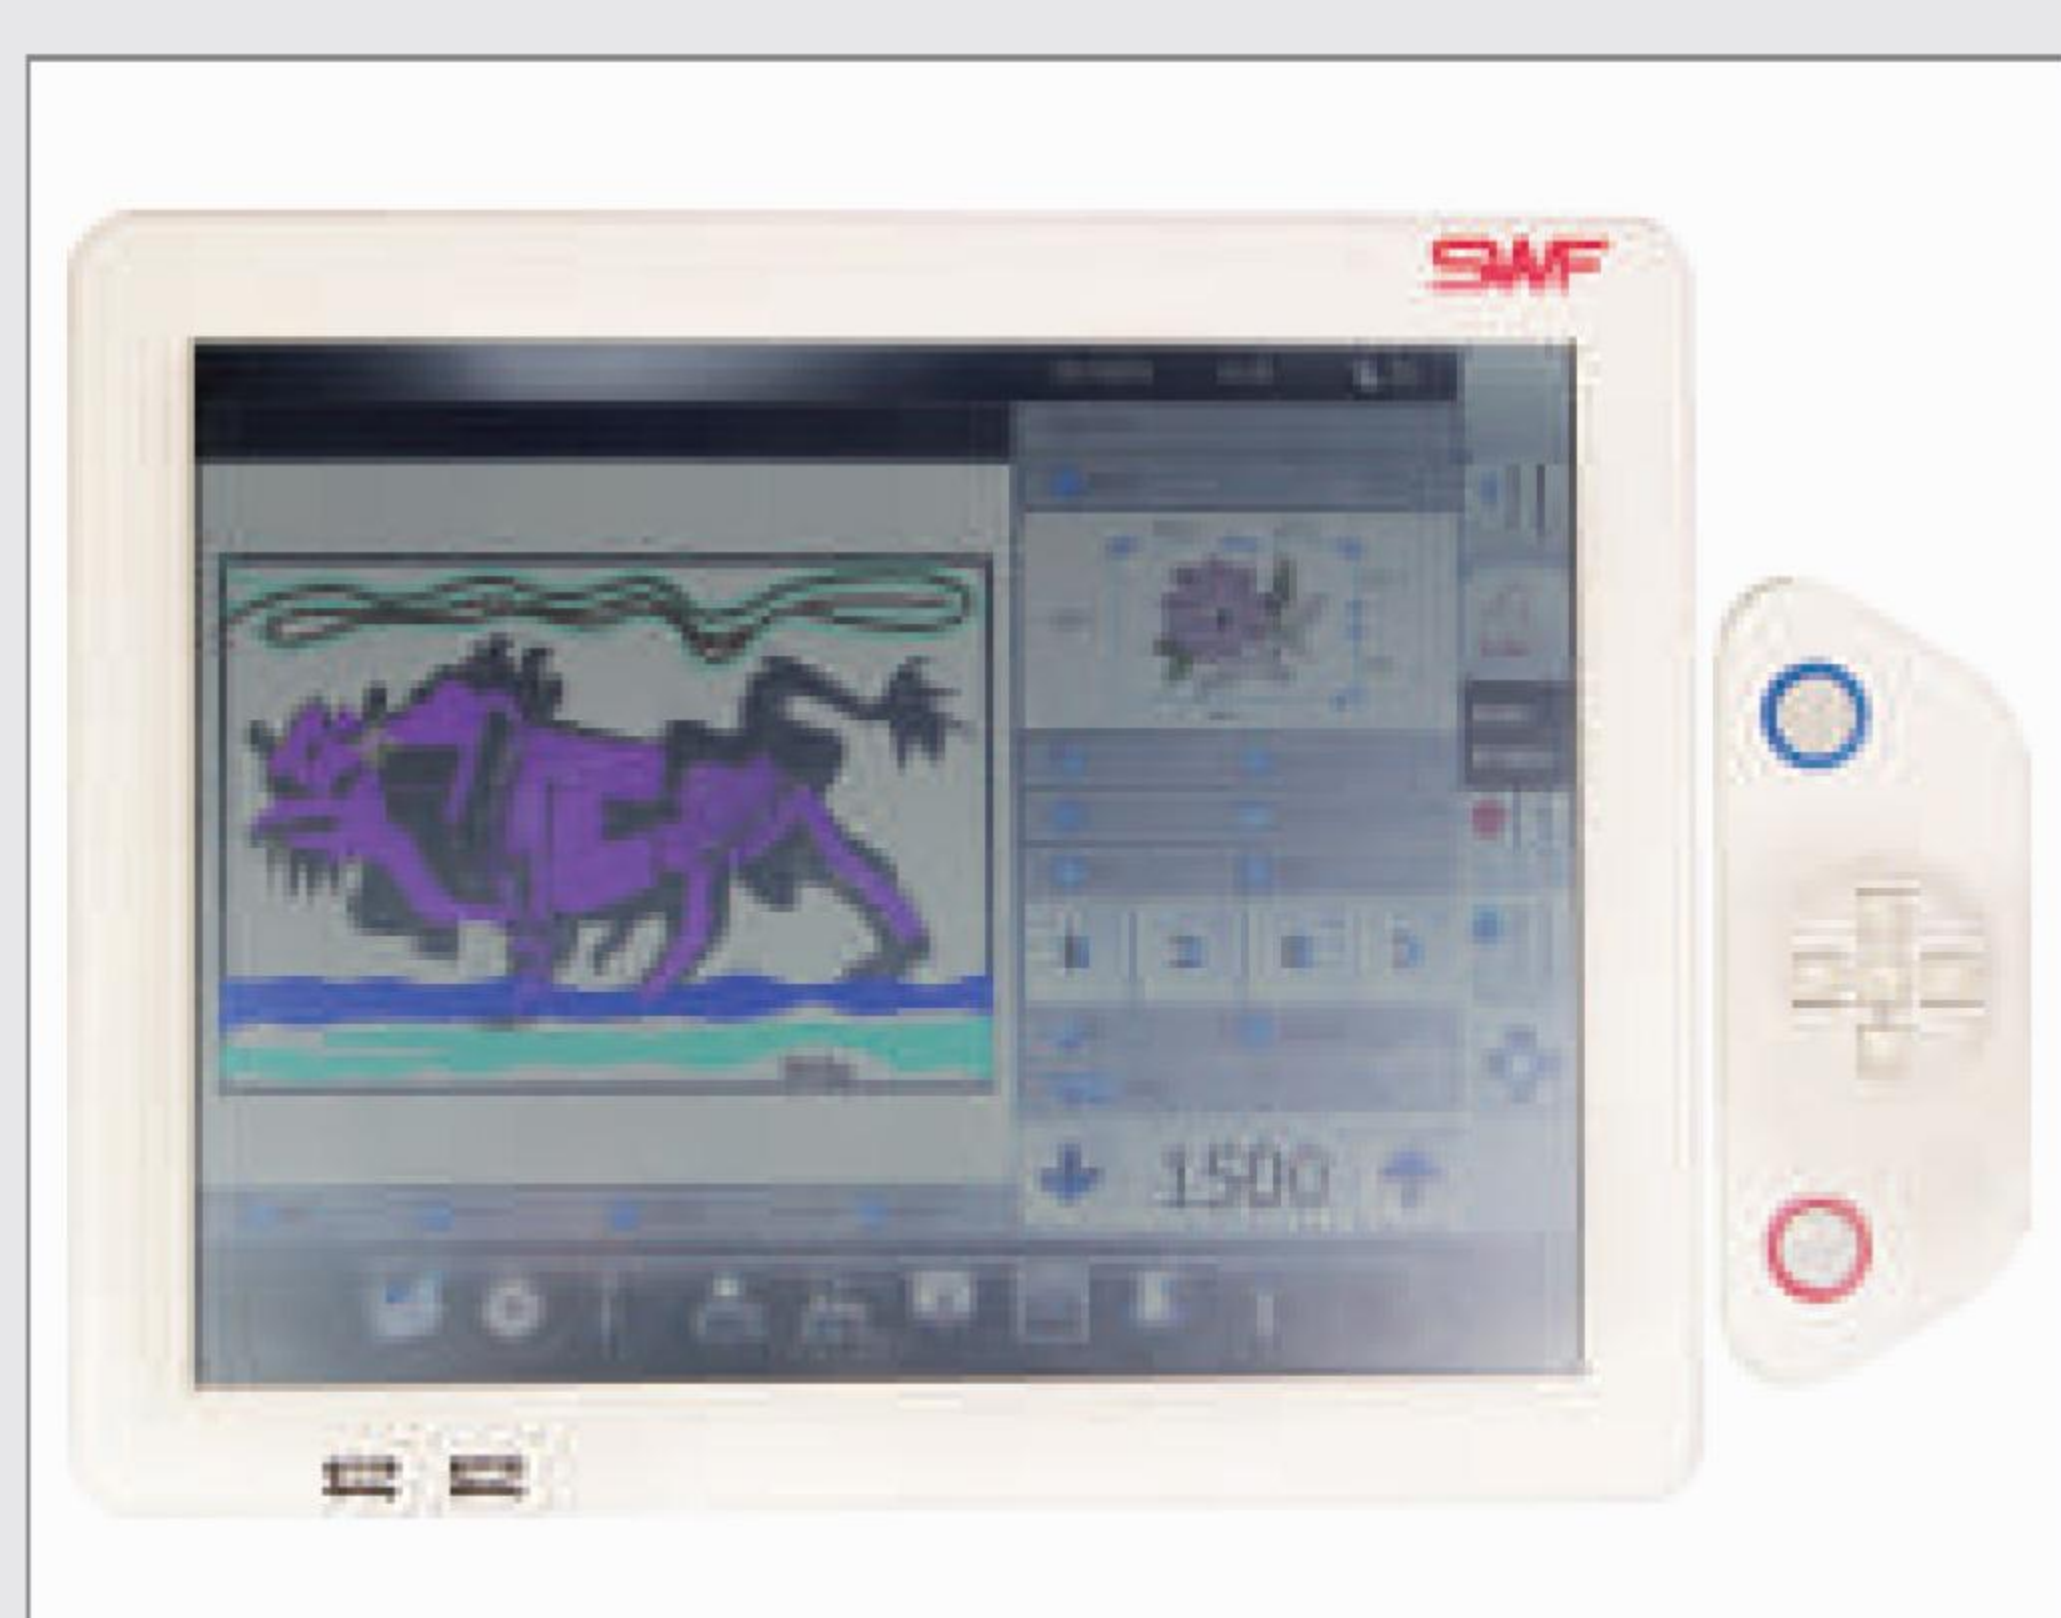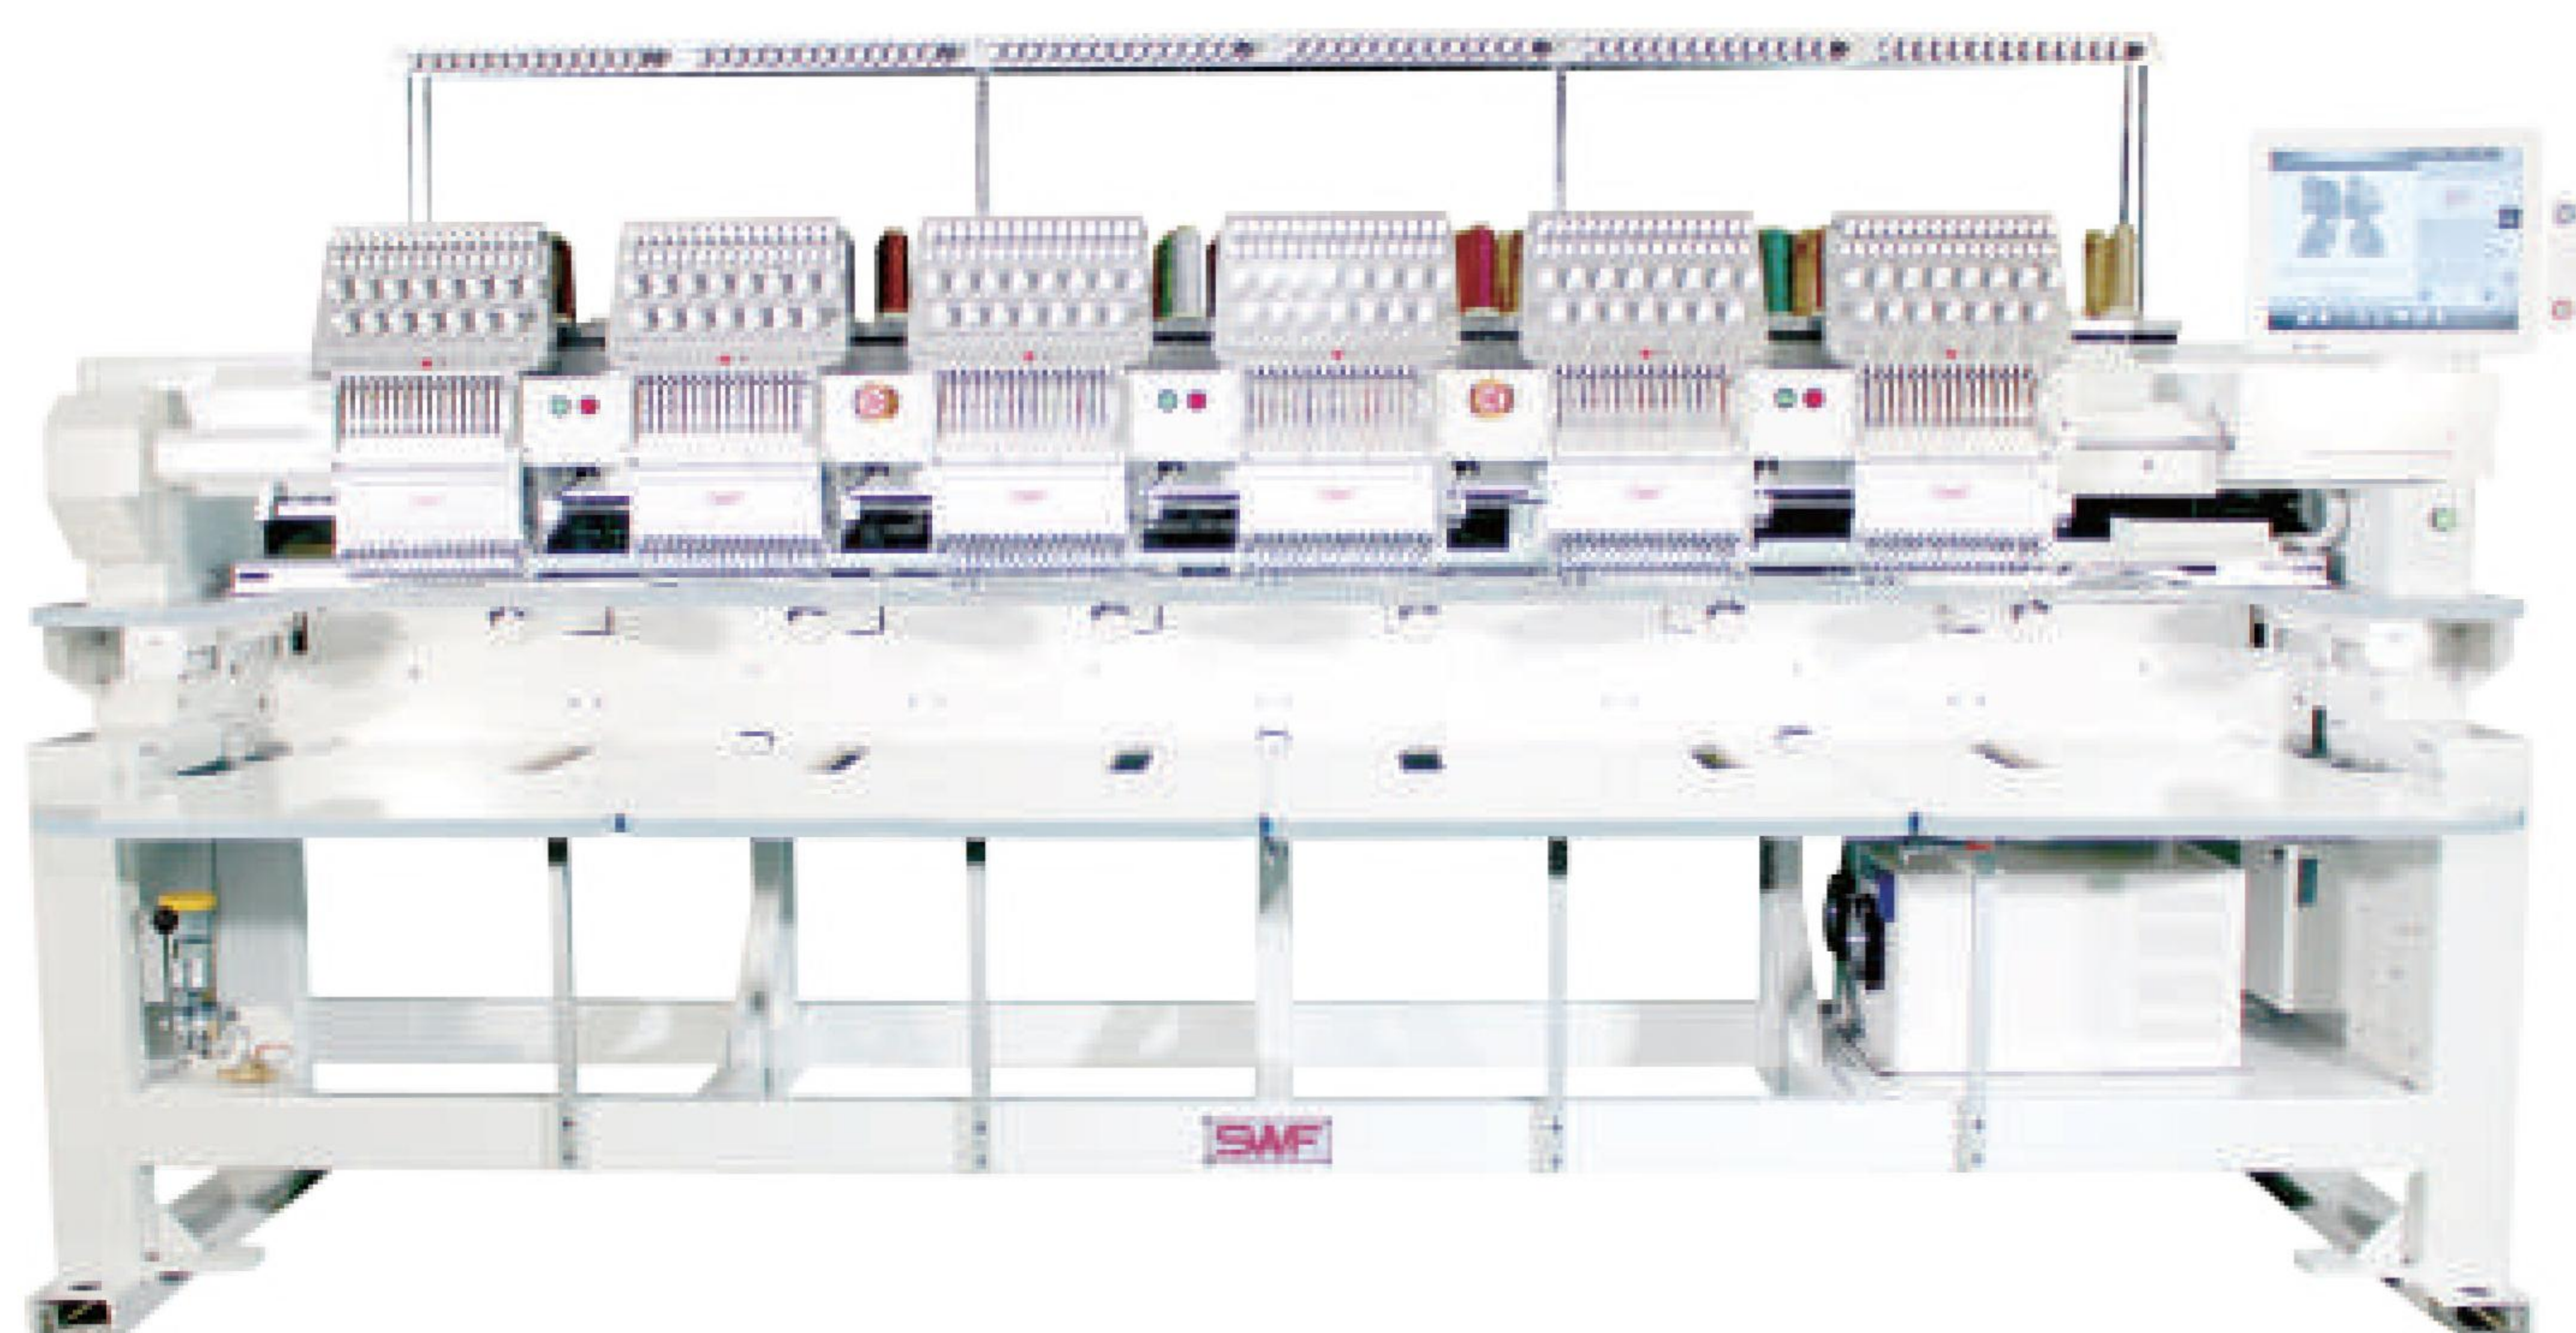

15.1 INCH TOUCH OPERATION PANEL

- 1) The full screen make it easy for the user to scan the outputs and operate the machine more effectively and conveniently



LUBRICATION

- 1) The drop-type greasing is easy for users and maintains clean work environment



JUMP MOTOR

- 1) Productivity is improved by no decrease of speed even at jump stitching.



UPPER THREAD HOLDING SYSTEM

- 1) Geared motor enables simultaneous operation of all heads, ensuring accurate timing.
- 2) Higher productivity

Specifications

Speed	Max. 1,000 rpm
Stitching Length	0.1 ~ 12.7 mm
Motor	Main X-Y Servo Motor x 1 Pulse Motor x 3
Electricity	1-Phase 100V, 110V, 120V, 200V, 220V, 240V [50/60Hz]
Power Consumption	2 Heads : 700 W 4, 6, 8 Heads : 1.0 kW
Bobbin Winder	Standard
Upper Thread Holding Unit	Standard
Lubrication	Semi-auto Lubrication System
Operation Box	15.1" Touch LCD
Hook	Standard Hook
Memory Capacity	Total: 40,000,000 Stitches, 1Design 2,000,000 Stitches
Memory Media	USB Memory Stick
Safety Device	Standard : Emergency Stop, Error Code Message
Optional Device	SQ60i Plus, Cording, Boring, Cap Frame [Semi/Wide]

- ※ Note
1. In case of "8-head" machine, the speed is lower than other models in some sections.
 2. In case of "UK 6-head" machine, the speed is lower than other models in some sections.
 3. Specifications, parts, and appearance of products are subject to change without prior notice.

Contact