OVEIOCK machine





- Built-in upper knife clutch device.
- Built-in tesion abjusting device.
- All knobs and lever are located at operator's left hand side.
- With differential and sitich length knobs.
- Built-in narrow rolled hemming.
 Not necessary to change the needle plate.
- Built-in looper threader
- Detachable expansion plate for free arm sewing.
- Built-in sewing lamp

Contact

OKURMA Pretty Lock 740D



- 3 / 4 threads convertible.
- Light weight Aluminum inner frame.
- Use needle HAx1 (# 80/90)
 or 130/705H (# 12/14)
- 1250 RPM Speed
- 1.1 4.0 mm stitch length.
- 2.3-7.0mm stitch width.
- Snap on presser foot.
- 25 mm needle bar stroke.
- N. Weight: 7.0Kgs / G. weight: 8.3 Kgs



Built-in upper knife clutch device



Built-in tension adjusting device



Built-in sewing lamp




Auto looper threader



Differential and stitch length knobs




Tension release:
To ensure all 4 threads can be inserted in the discs. You can also remove the finished work piece without the interruption on tensions.

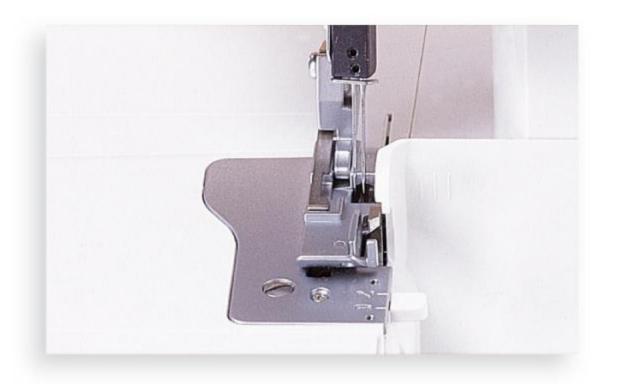

Built-in rolled hem:
No need to change the needle plate



Free arm:
Detachable extension plate for free arm sewing

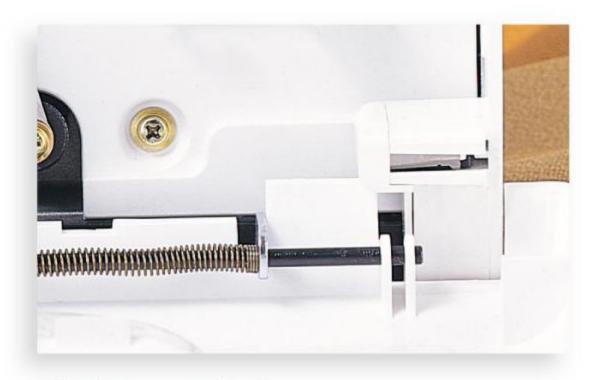

Safety switch:
To prevent any danger
while looper cover is opened

5 pcs Optional feet

