

整燙系列 FUSING PRESS SERIES

小型開邊式黏合機 OP-450GS/450GSL/520GS/520GSL MINI OPEN-SIDE FUSING PRESS MACHINE


用途：

- 針對平織／針織裁片之黏合工作。

優點：

- 體積小易於搬運。
- 開邊式：適合較大裁片，連袖裁片等。
- 螺旋式撥片，強化裁片撥離之能力，而且裁片不易起泡變形。
- 本機裝有特殊構造之輸送皮帶，可以排除皮帶的偏離，並確保其使用壽命。

- 迷你黏合機具有特製壓力輔助裝置，保證最大壓力強度至 $1\text{kg}/\text{cm}^2$ 。
- 電子溫度調節器，及特製加熱設備，將溫度差異範圍減至最小程度。
- 採用極完美且能保持熱度在一定程度的鐵氟龍傳動帶(Teflon)，而其清潔布桿可隨時保持皮帶之清潔。
- 強力散熱風扇，降低電子零件處於高溫時之損害。
- OP-450GSL/OP-520GSL為下皮帶加長型。

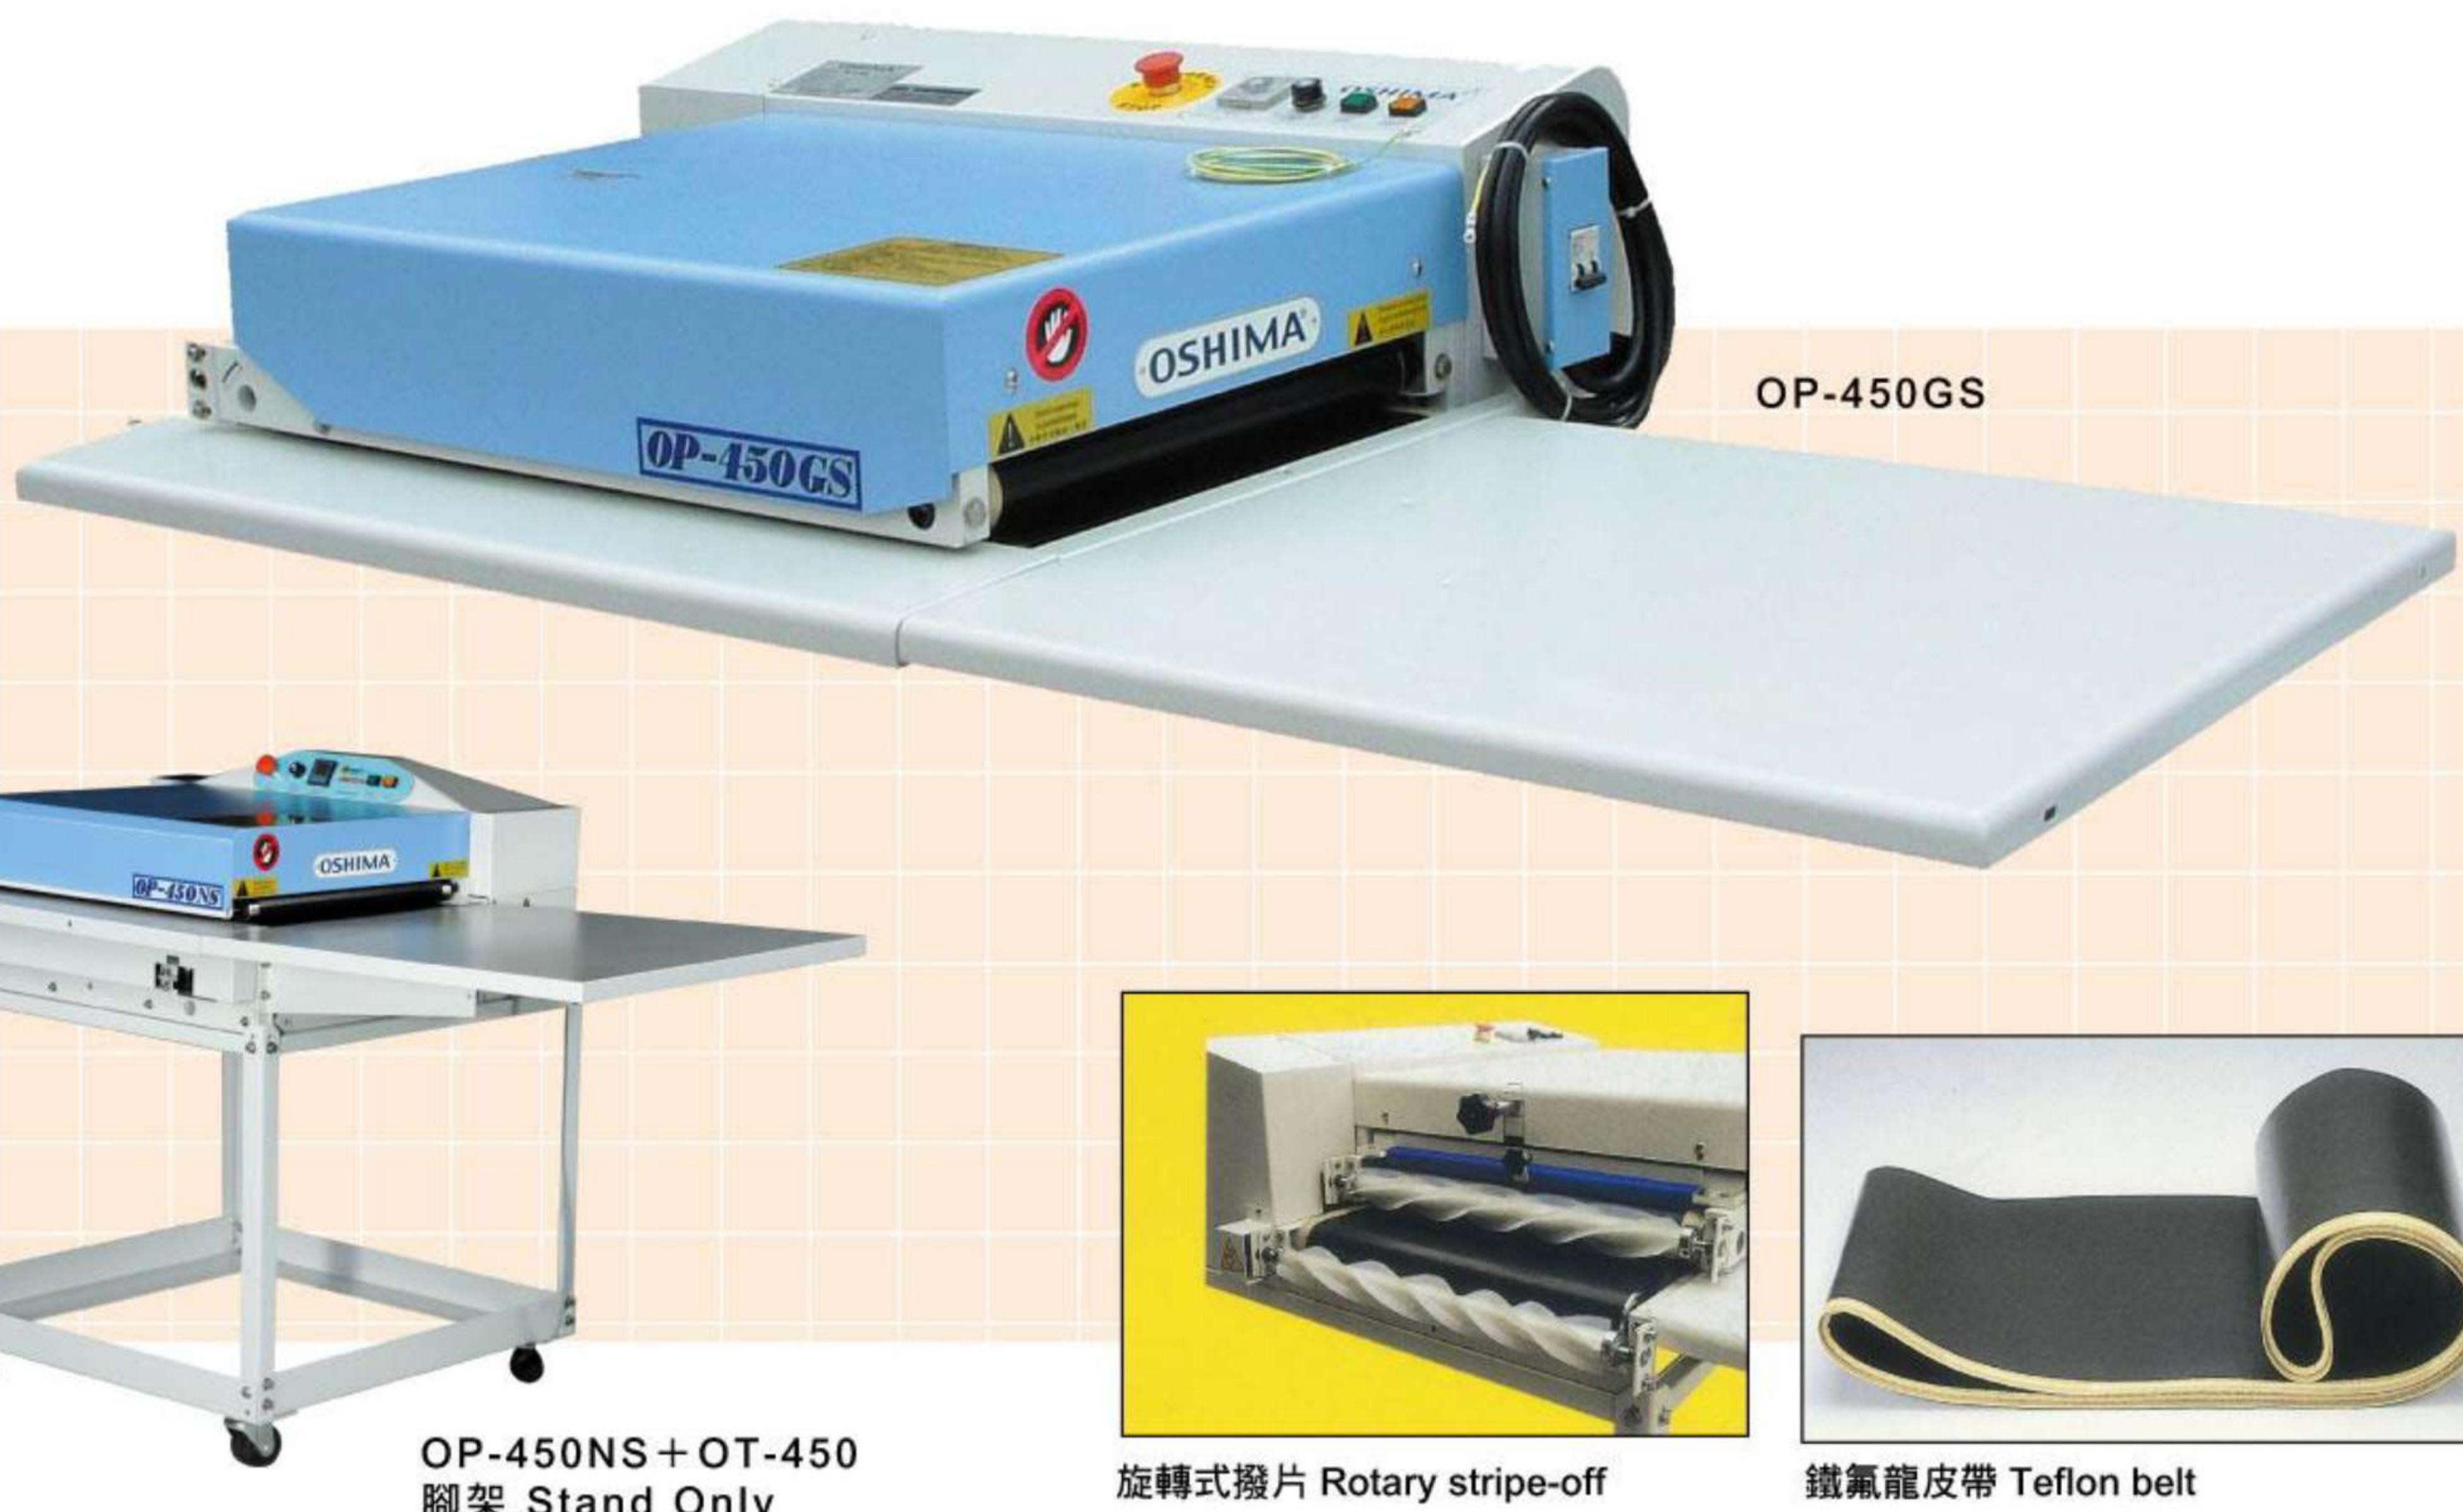

OP-450NS + OT-450
腳架 Stand Only



旋轉式撥片 Rotary stripe-off



鐵氟龍皮帶 Teflon belt

Application :

- For the interlining and fabrics fusing.

★ Use the excellent heatproof Teflon belt. This patented Teflon Belt is easy of maintenance and clean.

★ Powerful ventilate fan to lower the temperature of electronic components from damaging. .

Feature :

- Compact type that can be moved easily to any places.
- Side-open style: Fit for the bigger fabrics and various sizes.
- Rotary Strip-off device for strengthening the stripping off function and avoid transforming of the finished fabrics.
- Equipped with the super linear guide belt to prevent the belt from warping, and extend the duration of the belt.
- Equipped with the special-designed pressure mechanism to ensure the maximum pressure strength up to $1\text{kg}/\text{cm}^2$.
- Electronic thermostat and the special-made heating equipment minimize the temperature differences.
- OP-450GSL, and OP-520GSL: L series is the longer bottom belt for more efficient work.

規格 Specification

型號Model	OP-450GS	OP-450GSL	OP-520GS	OP-520GSL
電壓Power Supply	1P/220V			
馬達功率Motor		0.4KW		
電熱功率Heater	3.6KW		4.2KW	
最大壓力 Max Pressure		$1\text{kg}/\text{cm}^2$		
設定溫度Temperature		0~200°C		
黏合寬度Fusing Width	450mm		520mm	
黏合時間Fusing Time		5~34 sec		
刮布器Type of Scraper		旋轉撥片 Rotary Stripe-off		
機器尺寸L×W×H Dimensions(mm)	1700×910×360	2000×910×360	1700×980×360	2000×980×360
裝箱尺寸L×W×H Packing Volume(mm)	1120×950×560	1420×950×540	1120×1020×560	1420×1050×540
淨重/毛重N.W / G.W	145/170 Kgs		170/200 Kgs	

Contact