


# Ultrasonic Auto Elastic Cutting Machine



## HD/HD2268A-R

标准型  
Standard


带旋转切刀  
With Rotary  
cutter type

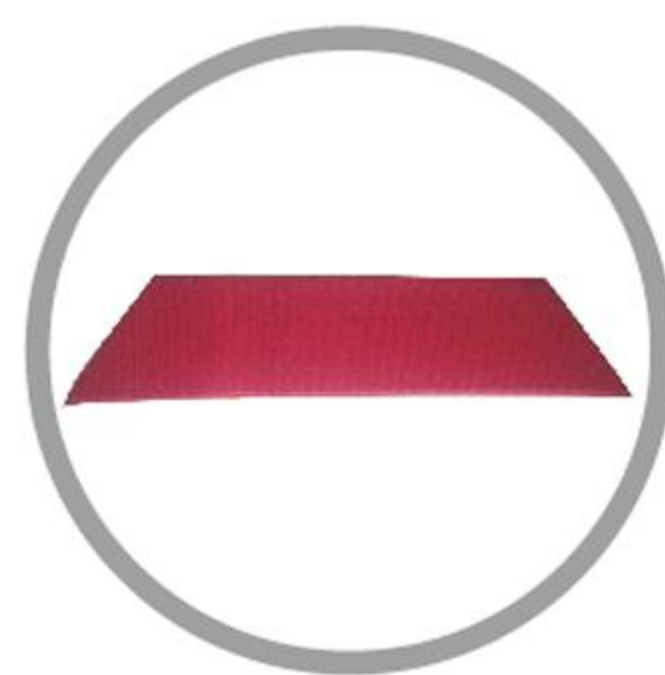

HD2268A-R 所切产品  
HD2268A-R Cutting Sample

## Function:

1. Digital operation panel sets size which is easy to handle.
2. Photoelectricity sensor is able to pre loosen tape in non-touch way.
3. Ultrasonic welding and cutting makes the section perfect without any scattering, which solves the shortage and dimension error by manual work.
4. Professional design adopts pin wheel to send elastic band, which reduces elastic stretch during sending and improves accuracy.
5. Manipulator material collecting system does not need manual sorting, and can collect more than 100 strips one time.
6. Wider applicability can cut different width and thickness of elastic band.
7. Artificial alarm system would automatically stop and alarm when encounters material entanglement, knot, or production completed.
8. Safety light curtain protection system makes the operation safer (When the hand is carelessly inserted into the dangerous area, it will automatically stop and alarm.)
9. Production setting: 0-34000; Max width: 50mm (more than 50mm track wheels need to be customized); Max cutting length: 1500mm (Margin of error:  $\pm 2$ mm in 100cm); auto stop when finishing the pre-setting production.
10. Work efficiency: 40 strips per minute in 500mm.
11. The angle of the cutter head is adjustable, and the maximum tilt is  $40^\circ$  (cutting angle heads need to be customized)
12. 1 person can operate 2-3 sets machine simultaneously (Save a lot of labor cost and improve the quality).

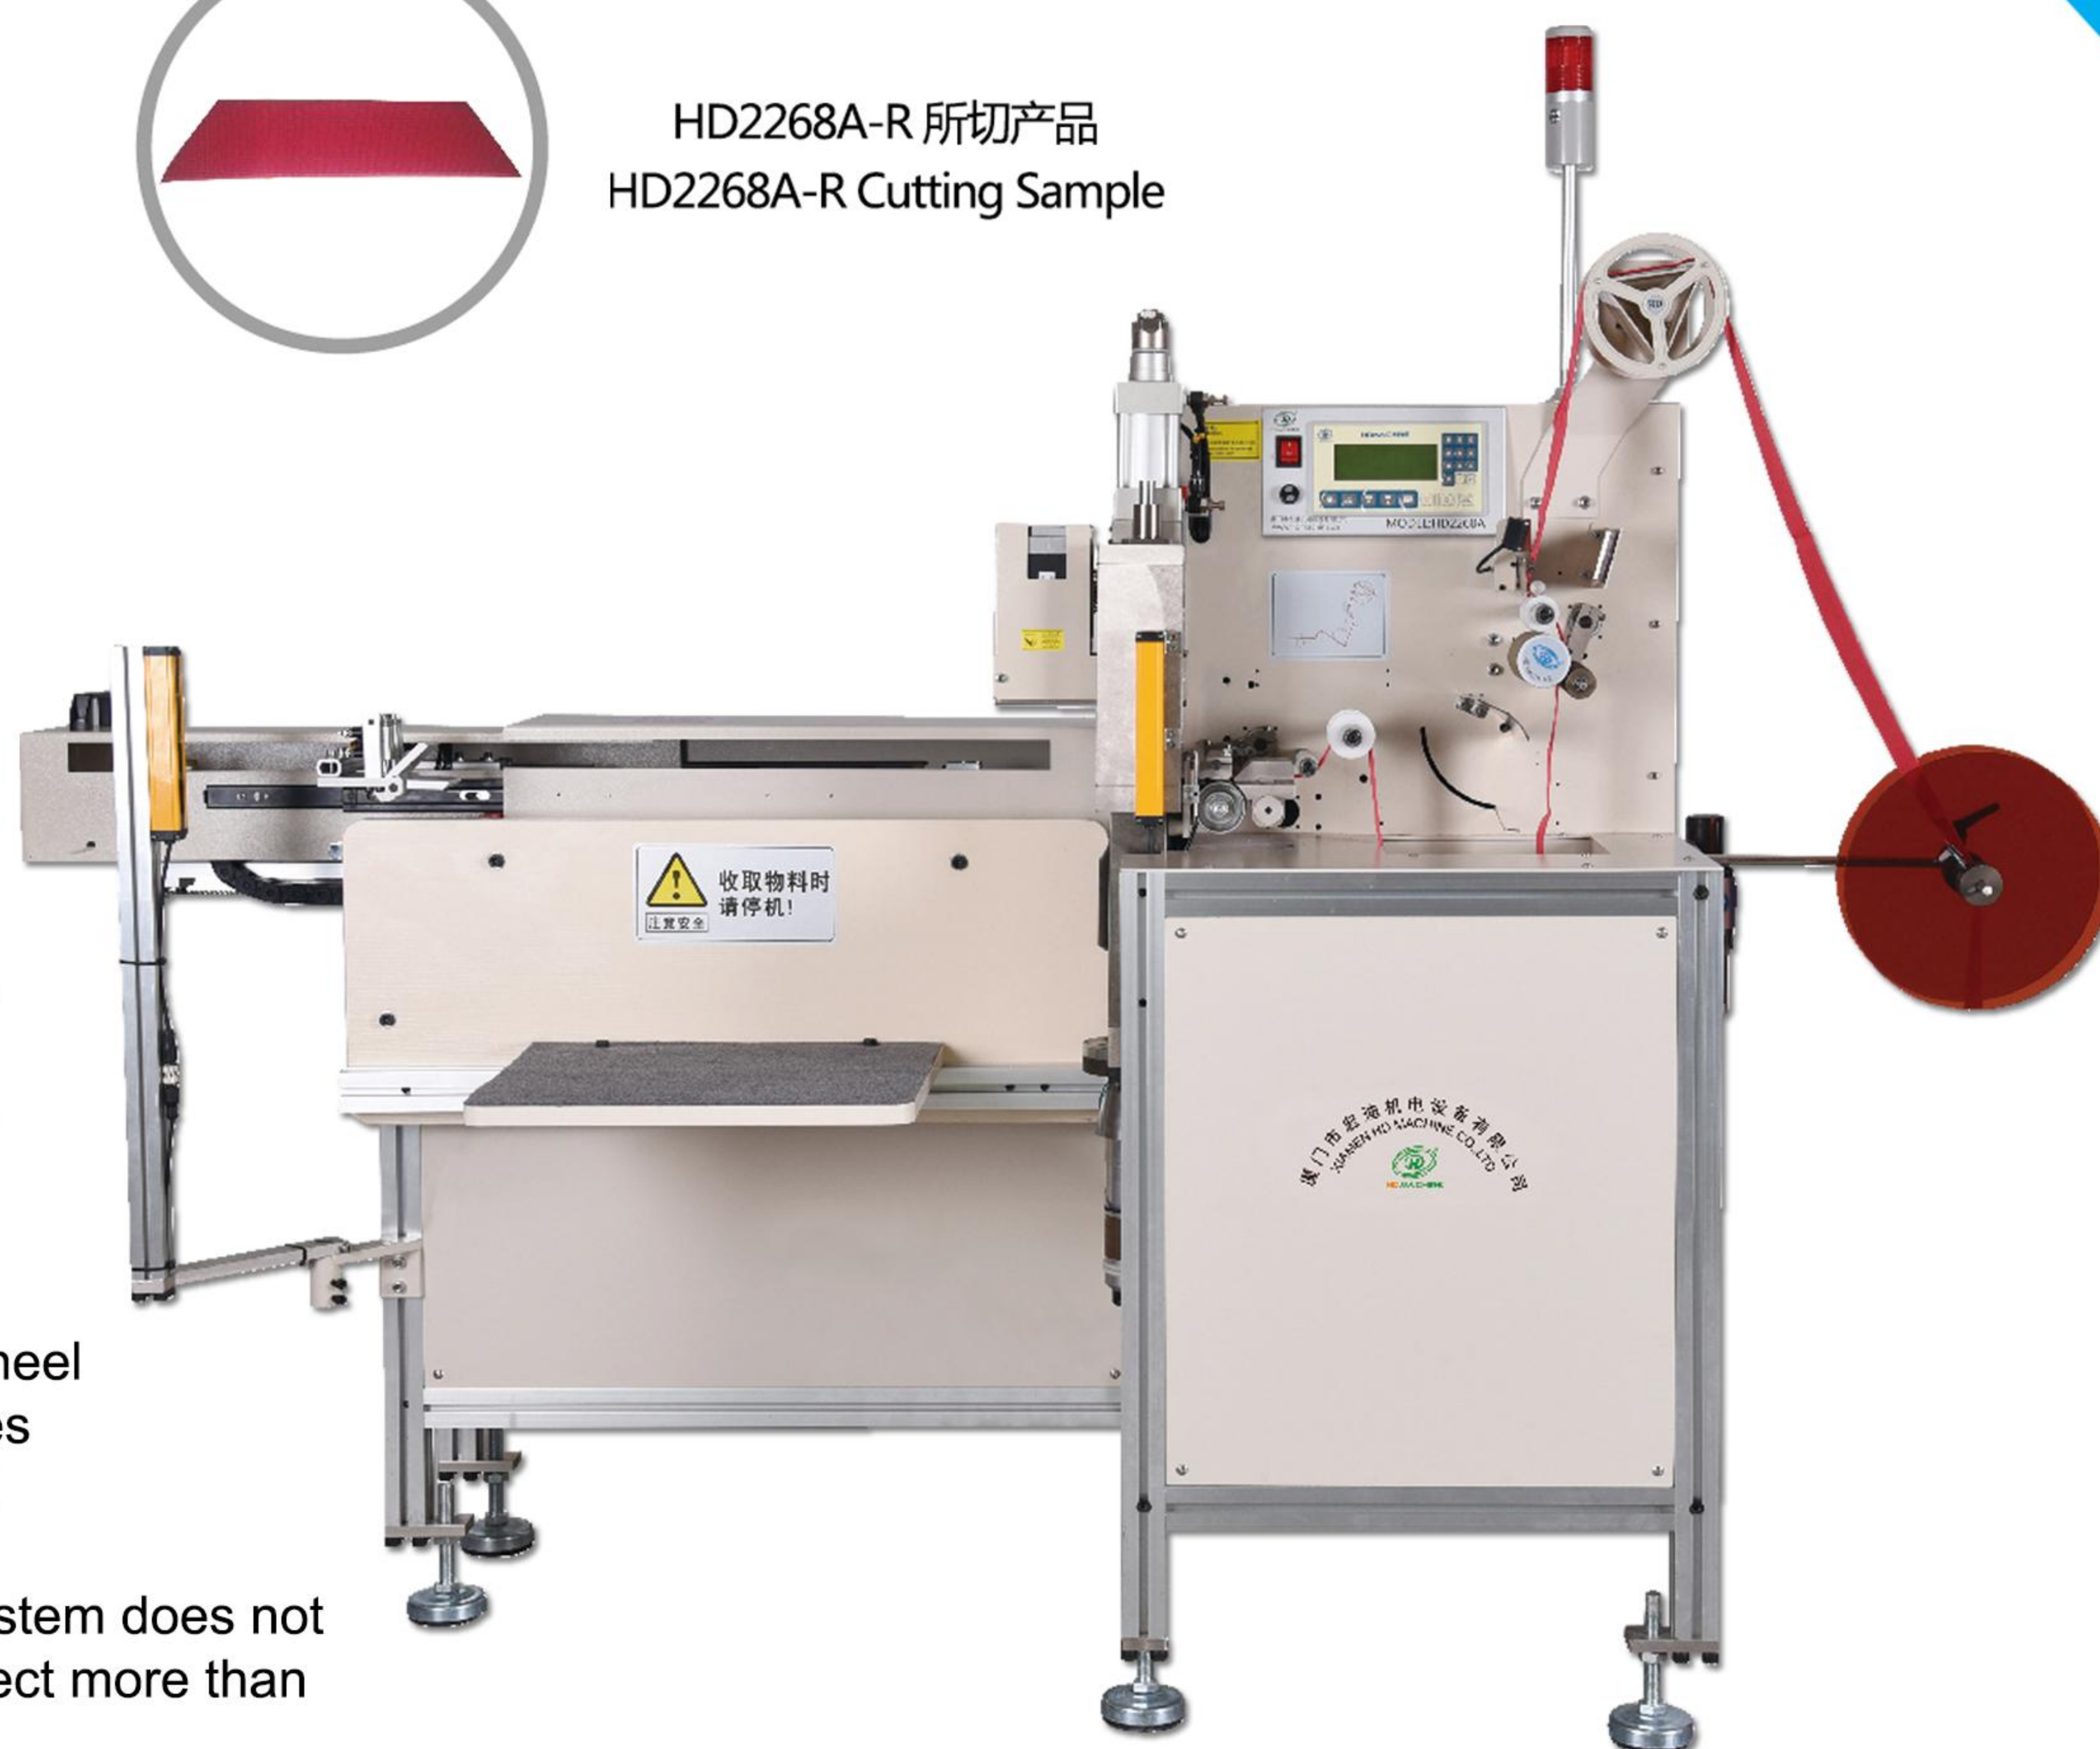

## Specification:

<b>Voltage:</b>	<b>220V; Power:2500W</b>
<b>Gas Pressure:</b>	0.4-0.5Mpa
<b>Dimension:</b>	L2.1m×W0.65m×H1.5m
<b>Weight:</b>	220KG

## Contact